MaxRack Stand | Bike Rack

SPECIFICATIONS

MaxRack System

MaxRack Stand is a space efficient and heavy-duty bike storage solution suitable for indoor or outdoor applications. A flexible, modular system, MaxRack Stands are available in 1-sided and 2-sided configurations with optional clips to enable lateral adjustment. Abutting units with shared posts can be added to achieve desired length. Both the front wheel and frame are U-lockable. MaxRack Stand works with all types of tires and fenders. Vertical Bike Rack: High density

- Heavy-duty construction w/solid steel lock bars
- Indoor/outdoor use
- Side-by-side units share posts to save space
- Accommodates all tires and fenders



© Copyright 2019 Velodome LLC. All Rights Reserved | L.PP.300.030 | 070919

GENERAL INFORMATION

Posts: 2" x 2" x ³/₁₆" Steel Tube

Feet: 1 1/2" x 2 1/2"

Crossbars: ³/₄" x 1 ¹/₂" 11 Gauge Steel Tube

Lock Bars: 3/4 " Dia. Solid Steel Rod

Finish: Powder Coated TGIC Polyester Paint RAL 9005/Jet Black Custom colors available

Options: Wall Saver Cross Bar (BCB) protects wall; see note under Views Lateral Adjustment Clips (MRC) to adjust bike spacing: 12" min./15" rec.

Installation: Anchor securely to level, concrete surface; Stagger track positions (high/low)

Ceiling Height: 8' min. required

MaxRack System is comprised of modular bike racks and mounting fixtures that offer interchangeability with a cohesive aesthetic.


MODULAR BIKE RACKS: MODULAR FIXTURES: MaxRack Hanger (vertical) MaxRack Wall Bracket RampRack (semi-vertical) MaxRack Stand (1 or 2-sided)

DIMENSIONS/CAPACITY

MaxRack Stand	Length	Width	Height	Spacing	Bikes		
1-sided							
MRS-1-4	62 ½"	30"	84"	15"	4		
MRS-1-5	77 ½"	30"	84"	15"	5		
MRS-1-6	92 ½"	30"	84"	15"	6		
1-sided M ("M" indicates add-on unit which has one support post)							
MRS-1-4M	60 ½"	30"	84"	15"	4		
MRS-1-5M	75 ½"	30"	84"	15"	5		
MRS-1-6M	90 ½"	30"	84"	15"	6		




BIKE PARKING SOLUTIONS Bike Shelters Bike Racks Bike Storage Systems












MaxRack Stand	Length	Width	Height	Spacing	Bikes
2-sided					
MRS-2-8	62 ½"	60"	84"	15"	8
MRS-2-10	77 ½"	60"	84"	15"	10
MRS-2-12	92 ½"	60"	84"	15"	12
2-sided M ("M" ind	dicates add -	on unit whi	ch has one su	pport post)	
MRS-2-8M	60 ½"	60"	84"	15"	8
MRS-2-10M	75 ½"	60"	84"	15"	10
MRS-2-12M	90 ½"	60"	84"	15"	12

888-995-8090 32 Ann Street Clifton, NJ 07013 info@velodomeshelters.com www.velodomeshelters.com

MaxRack Stand | Bike Rack

SPECIFICATIONS

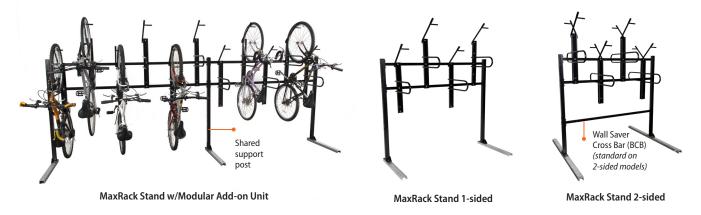

MaxRack Stand

MaxRack Stand comes 1-sided or 2-sided for optimum space efficiency. When abutting units, begin with a standard unit and choose *add-on units* thereafter. Add-ons save linear space by sharing a support post with its neighbor.





MRS-1-5 (5 bikes)



MRS-1-6 (6 bikes)



MRS-1-4 + MRS-1-4 M (8 bikes)

"M" after a style number denotes *add-on unit* with a single support post.

2-SIDED

MRS-2-8 (8 bikes)

MaxRack System MaxRack coordinates with other rack and fixture components in our MaxRack System for the ultimate in versatility and customization.



MRS-2-10 (10 bikes)



MRS-2-12 (12 bikes)





(w/MaxRack Hangers & RampRacks)



MaxRack Hangers (shown wall mounted)



MaxRack Wall Bracket